



OMTEX ELEVATOR

Machine Room Less (MRL) Lifts


Civil Dimensions

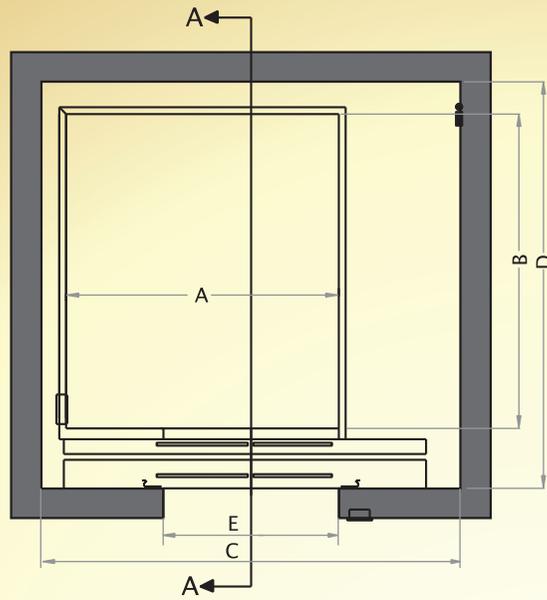

LIFT SHAFT, CAR, & C.W. PLAN

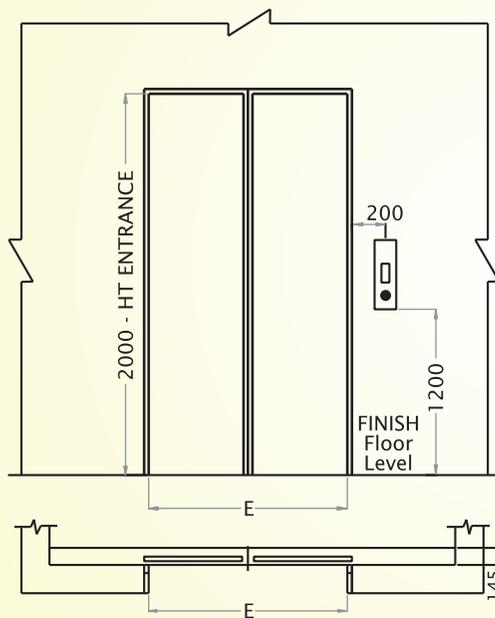

DETAILS AT DOOR OPENING

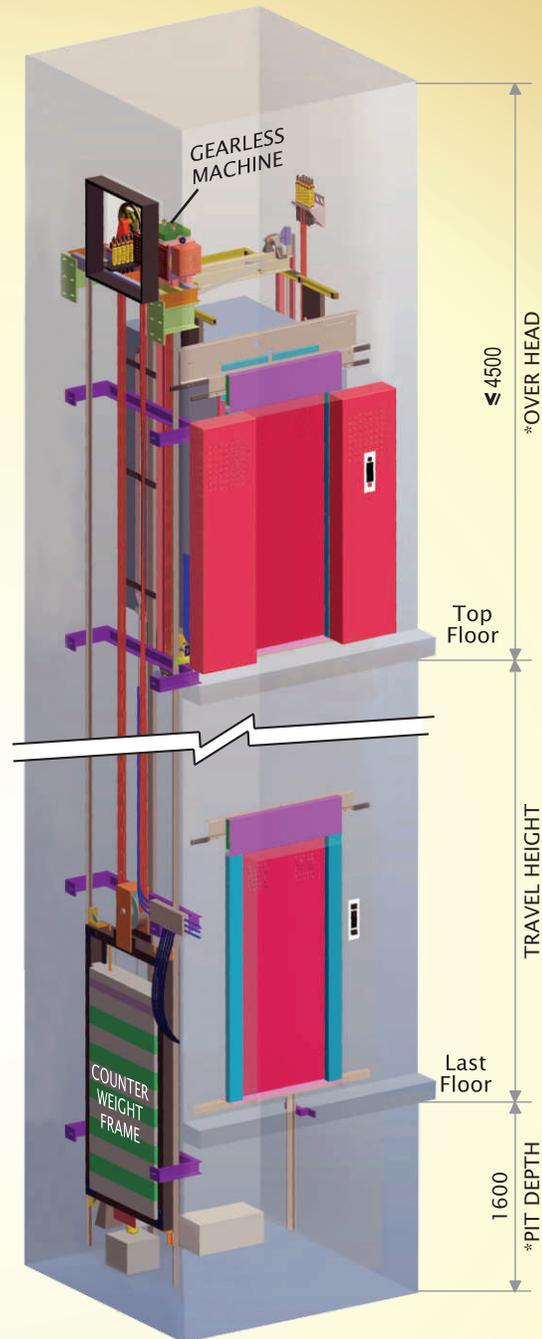

(SECTION : A-A)
LIFT WELL

Gear Less / Machine Room Less (MRL) Automatic Door-Passenger Lift

Automatic Centre Opening / Telescopic Doors-MRL Lifts

No. of Persons	Rated Capacity	Speed	Entrance Width (E)	Car Size (A x B)	Hoistway Dimensions (C x D)	PIT	Over Head
	KG	M/S					
6	408	1.00	700	1100 X 1000	1750 X 1450	1600	4500
		>1.50<1.75			1850 X 1450	1800	4800
		2.5			1900 X 1450	2500	5500
8	544	1.00	800	1100 X 1300	1750 X 1750	1600	4500
		>1.50<1.75			1850 X 1750	1800	4800
		2.5			1900 X 1750	2500	5500
10	680	1.00	800	1300 X 1350	1950 X 1800	1600	4500
		>1.50<1.75			2050 X 1800	1800	4800
		2.5			2100 X 1800	2500	5500
13	884	1.00	900	1300 X 1700	1950 X 2150	1600	4500
		>1.50<1.75			2050 X 2150	1800	4800
		2.5			2100 X 2150	2500	5500
16	1088	1.00	1000	1500 X 1750	2150 X 2200	1600	4500
		>1.50<1.75			2250 X 2200	1800	4800
		2.5			2300 X 2200	2500	5500
20	1360	1.00	1000	1500 X 2000	2200 X 2450	1600	4500
		>1.50<1.75			2300 X 2450	1800	4800
		2.5			2350 X 2450	2500	5500

- Notes: 1. The Minimum Dimensions Are Shown In Above Table. Some Allowances Should Be Considered For Sloping Hoistways.
2. When Non Standard Capacities & Dimensions Are Required, Then Consult **OMTEX ELEVATOR**